



ENGINEERED BY



Architech Series

AT-2x6

2-Way, 2 x 6.5"
Fixed installation System

Description:

The AT-2x6 Unit is a compact system, able to reproduce musical and speech programmes with an unusual fidelity compared with similar size cabinets.

It is structurally constructed from a single piece of pre-formed, rounded multi-ply shell, without any joint in its main body. This shape offers a clear reproduction of music without unwanted vibrations and acoustic colouring found in other materials.

It has been designed as a two-way passive system, in a "Uni-Block" concept, with two 6.5 inches transducers in "Isobaric Compound" configuration, performing flawlessly as a high level music system, as well as a speech reproduction system in an emergency paging installation.

It is equipped with a Wide Directivity High-Frequencies Horn that gives the cabinet a brilliant and pleasant character, achieving a balanced response throughout its wide coverage field.

The AT-2x6 can be used on its own without any electronics processing, but has been conceived right from the start and following the current tendencies, to obtain its full musical expression capabilities, through the use of a specific signal processor. Thus, the AT-2x6 is able to reproduce the deepest bass with utmost purity, expression and reliability.

When coupled to one of the Subs available in the Series (ATS-12; ATS-15), the AT-2x6 can be used as a small sound reinforcement system, able to generate punchy, clean and vigorous sound pressure levels.

Characteristics:

- "Uni-Block" unit designed for use in High Level indoor Installations.
- Wide Vertical and Horizontal coverage High-Frequencies Horn for perfect dispersion in the coverage area.
- Passive filter which optimizes the critical voice zone response.
- Steel front grille with acoustic foam.
- Installation ready with inserted nuts on the base and the back panels.
- The specific electronic controller guarantees: linear performance, powerful bass response, reliability.

Applications:

- Fixed Installation in Bars, Lounges, Shops, Theatres, Conference Rooms, etc.
- Near field monitoring
- When used together with the series' Sub-woofers ATS-12; ATS-15, the system becomes a performing set-up for small events.



Construction detail



Specifications and Characteristics

Frequency Range (Hz) ¹	-10dB 39Hz - 20KHz
Frequency Response (Hz) ¹	± 3dB 48Hz - 18KHz
Nominal Impedance	4 Ohm
Power Rating (RMS) ²	120W
Program ²	240W
Peak ²	480W
Horizontal Coverage (-6dB)	120°
Vertical Coverage (-6dB)	60°
Sensitivity (dB/1w@1m.)	87dB SPL
SPL Max Peak (dB SPL @ 1m.) ³	110dB SPL
Connectors	Pressure connector
Recommended Signal Processor	RAM Audio LMS221 Processor
Recommended Power Amplifier	160W / 250W @ 4 Ohm
Recommended Sub-woofer	SPACE ATS-12; ATS-15

Enclosure and Installation

Enclosure	Vertical "Uni-block", single body, 12mm thick cross ply construction, tongue and groove assembly throughout. Bi-component epoxy finish.
Protection Grille	One mm Laminated Steel with textured epoxy finish. Acoustic foam.
Dimensions (H x W x D)	420 mm x 240 mm x 278 mm
Net Weight	6,8 Kg
Installation System	"Varifix" TM ready with inserted nuts in back and bottom


¹ Specifications in half space, (with processor)

² With filtered Pink Noise 6dB crest-factor


³ Calculated from the Sensitivity and Power Data

AT-2x6


2-Way, 2 x 6.5", Fixed installation System

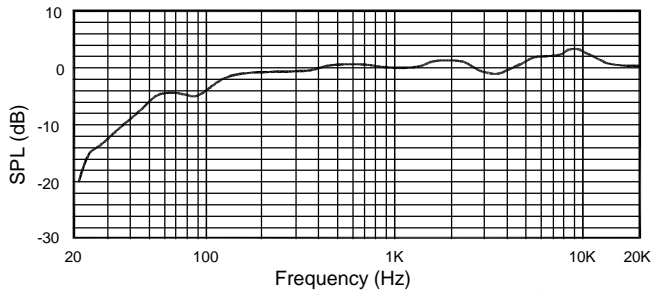


Normalized Response (without Processing)
1/3 Oct. Avg.

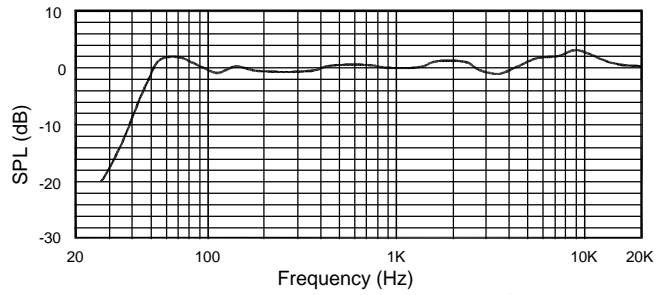


Normalized Response (with Processing)
1/3 Oct. Avg.

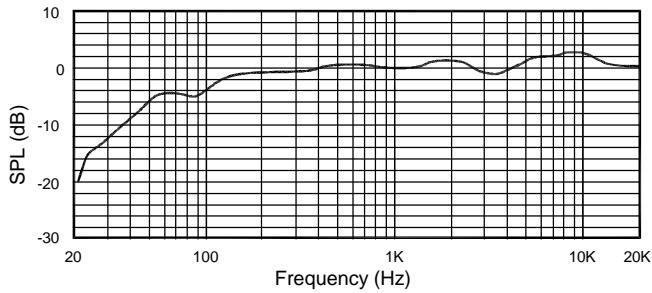


Normalized Response $\pm 15^\circ$ HORIZONTAL
1/3 Oct. Avg.

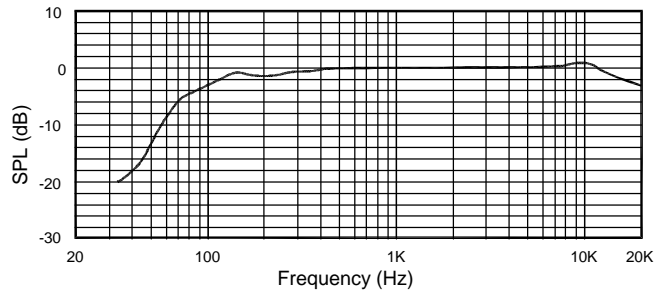


Normalized Response $\pm 15^\circ$ VERTICAL
1/3 Oct. Avg.

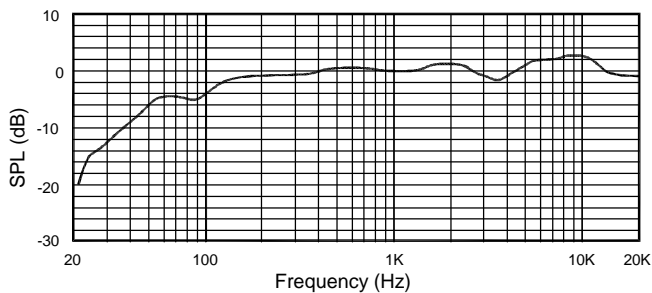


Normalized Response $\pm 30^\circ$ HORIZONTAL
1/3 Oct. Avg.

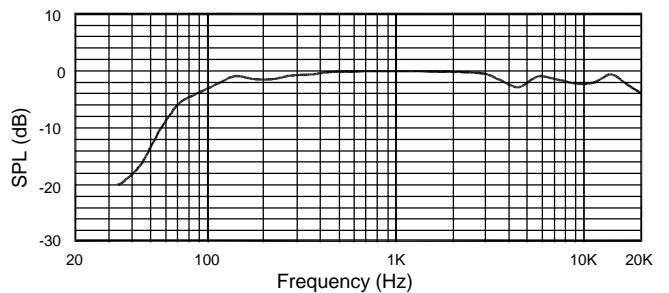


Normalized Response $\pm 30^\circ$ VERTICAL
1/3 Oct. Avg.

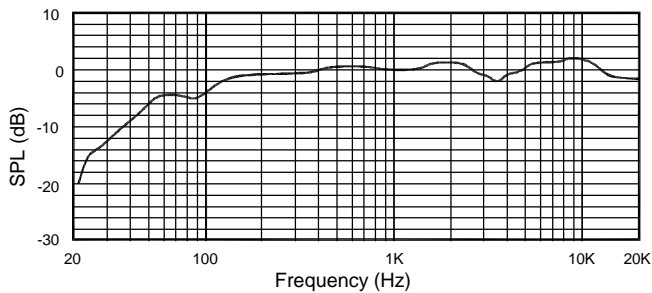

Normalized Response $\pm 45^\circ$ HORIZONTAL
1/3 Oct. Avg.

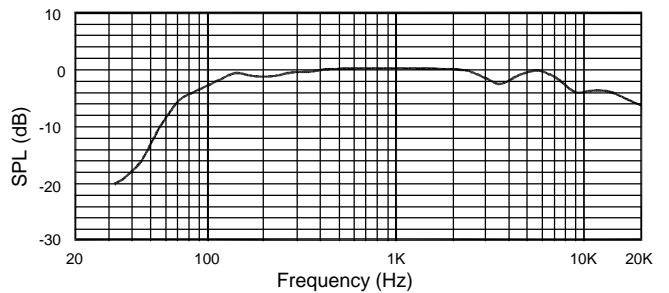

Normalized Response $\pm 45^\circ$ VERTICAL
1/3 Oct. Avg.

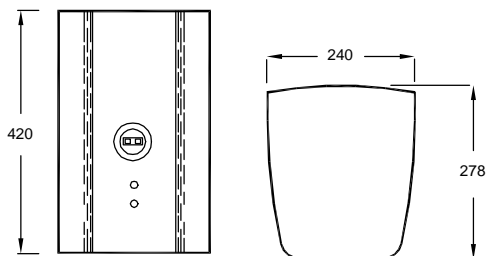

C.E. STUDIO - 2 S.L.
P.I. La Loma, C/ Serra Perenxisa, 28
46960 Aldaya - Valencia - SPAIN
Phone: +34 96 1273054
Fax: +34 96 1273056
<http://www.spaceequipmentaudio.com>
e-mail: support@spaceequipmentaudio.com